

Existing floor and slab to be retained. Floor ceramic tiles retained wherever possible. New linecrete ramp installed as shown (including under benches). Tiles put back. Any new tiles to be installed to match size, colour, texture and pattern of existing.

Existing church level to be retained. New porch ramp to suit level.

Strip of black tiles at change of level


Floor spring dosers only

Existing stone pilasters, their bases and capitals to be repaired.

New glazed lancet door set to be fitted inside porch to prevent dashing with side pilasters.

Existing slabs to landing area relaid level

Existing steps and ramps to be retained.

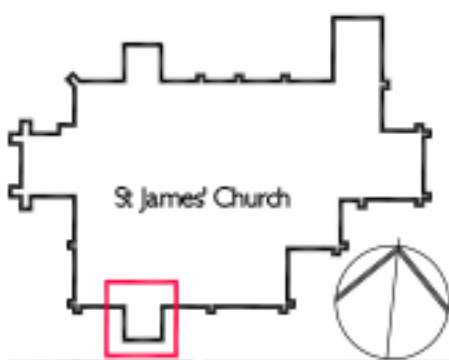

Revision A: notes amended. 07.01.2020.

THOMAS FORD & PARTNERS CHARTERED ARCHITECTS SURVEYORS 177 KIRKDALE SYDENHAM • LONDON • SE26 4QH TEL 020 8659 3250 • FAX 020 8659 3146 EMAIL tfp@thomasford.co.uk	PROJECT WEYBRIDGE ST JAMES' CHURCH PEWS REMOVAL	TITLE PROPOSED WORKS TO SOUTH PORCH PLAN, SECTION AND ELEVATION	DATE	DRAWN	SCALES	CHECKED
			AUG 2019	AS	1:50	JB
			PROJECT REF. 693058	DRG. No. GA-120	REV A	